



DLS SCANDINAVIA 1 COMPETITION GRADE TWEETER


DLS Scandinavia 1 is a tweeter specially designed for competition use. The extreme audio performance makes it a winner in every Pro installation.

FEATURES AND BENEFITS:


- ▷ Extreme audio performance, transparent and clear sound
- ▷ Great imaging and staging capabilities
- ▷ High resolution and dynamics with plenty of micro details
- ▷ Extremely low distortion

Size of tweeter	28 mm / 1,1"
Impedance	4 ohm
Rec. amp. power	50 - 200 Watt
Frequency range	1 kHz - 30 kHz
Fs	655 Hz
Sensitivity	93 dB
Dome material	Coated fabric
Outer diameter	95 mm (3,74")
Mounting hole	75 mm (2,95")
Installation depth	33 mm (1,3")
Rec. X-over freq.	4 / 5 / 6 kHz
Rec. spkr. cable	DLS HQS 2 x 2,5
Rec. line cable	DLS HQL

DLS Svenska AB
Göteborg - Sweden
Phone: +46 31 840060
www.dls.se

 Photos of installations in vehicles can be found on www.dls.se

DLS SCANDINAVIA 1 IMPEDANCE CURVE

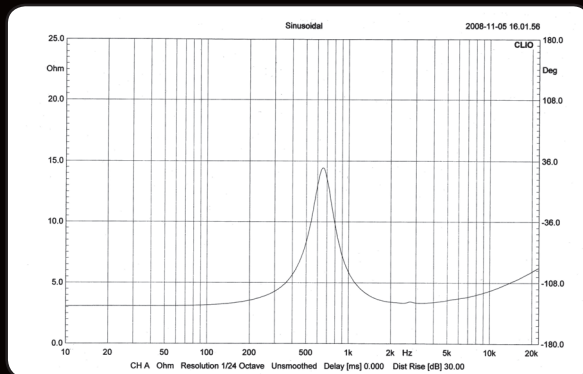

DLS SCANDINAVIA 1 FREQUENCY RESPONSE CURVE

